


ATA PTX4 Remote

PROGRAMMING INSTRUCTIONS



Pairing a New Remote via Control Panel/Receiver


- **OPENER:** Locate the receivers control panel attached to your garage door or gate opener. If there is a clear plastic cover remove this before starting the programming process. Sliding Gate and Swing Gate motors control panel will be found inside the enclosure.
- **OPENER:** Press and Hold down the "Door Code" or "Code OSC Button"
- **NEW REMOTE:** Press the NEW remote for two (2) seconds, release and then press again for another two (2) seconds.
- **OPENER:** Release the "DOOR CODE" button on the opener

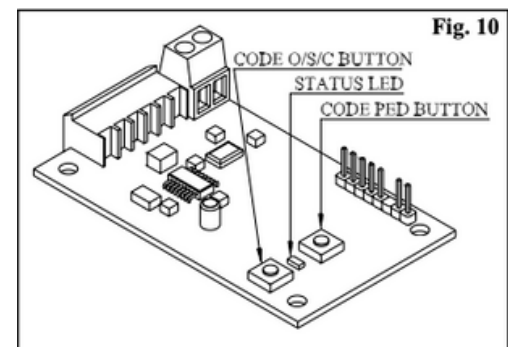

Pairing a NEW Remote via a GENUINE PTX4 remote

Complete this task within 1-2m of your opener. Hidden button is found in the centre of the 4 buttons of a genuine PTX4 remote.


- **GENUINE WORKING REMOTE:** Press the button that functions the door/gate. Using a small needle or paperclip press through the Coding hole for two (2) seconds.
- **NEW REMOTE:** Within ten (10) seconds, Press the NEW remote for two (2) seconds, release and then press again for another two (2) seconds.

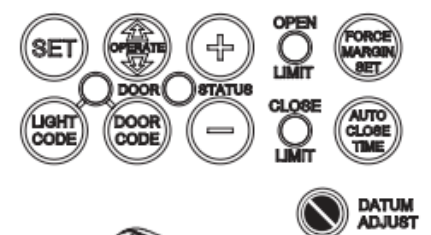

Deleting all Remotes from Opener

Turn off power to the Opener.

Press and Hold the "DOOR CODE" or SW1 Button whilst turning power back on. Continue to hold "DOOR CODE" button until coding LED illuminates.

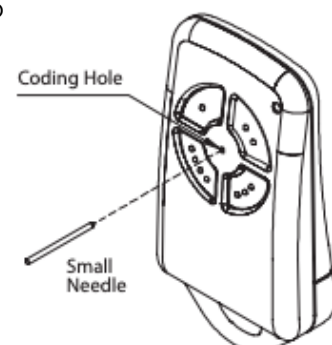

Warning: This product may contain a pre-installed Lithium Coin Battery. Please keep product and batteries out of reach of children. Please see [button battery safety information](#) from the Australian Competition & Consumer Commission (ACCC) for more information.