

CENTURION Remote

PROGRAMMING INSTRUCTIONS



Programming to Motors with LCD Control Panel

This motor has two settings. Make sure you choose the right setting for your needs.

SINGLE MOTORS (One Motor)

Opener: Press the red "LEARN" button, LED light will flash and bu will show on the display

Remote: Press top button on handset, release and press top button again., LED light will flash rapidly indicating successful coding.



MULTIPLE DEVICES (Two Single Garage Doors - Side by Side)

Opener: Press the red "LEARN" button, LED light will flash and bu will show on the display

Opener: Use the yellow "+" button to scroll through until ru shows on the display

Remote: Press the button on handset you would like to activate that motor, release and press button again., LED light will flash rapidly indicating successful coding.

Repeat this step for the other motors - choosing a different button on your remote.

Clearing the Memory

Opener: Press the red "LEARN" button on opener once, LED will display bu and light will slowly flash

Opener: Hold the green "CONFIRM" button for 5 seconds, LED light flashes rapidly

Programming to motors with older non LCD Control Panel

Opener: Press and Release the yellow "LEARN" button, LED light will glow solid


Remote: Press and release the remote button, LED light will turn off

remote: Press and release again, LED light will flash quickly

Clearing the Memory

Opener: Switch the opener off at the power supply

Opener: Press and Hold down the yellow "LEARN" button whilst switching the power back on, LED light will flash quickly

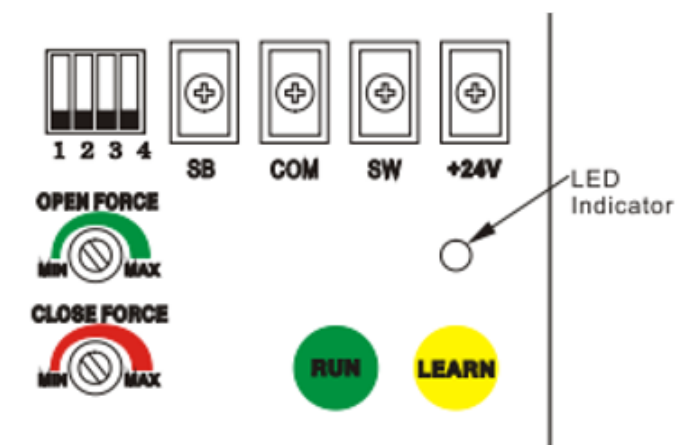

Warning: This product may contain a pre-installed Lithium Coin Battery. Please keep product and batteries out of reach of children. Please see [button battery safety information](#) from the Australian Competition & Consumer Commission (ACCC) for more information .